

SURGE-TRAP® STXP SERIES



The Surge-Trap® Type 1 STXP Series offers advanced performance and features over the STXR series including higher surge capacity and phase LED status indicators. The STXP meets requirements for UL1449 Fourth Edition and has been designed for additional mounting flexibility including mounting feet and flush-mount capability. The STXP features TPMOV® technology inside making it the safest product available. Installation can be done on the line or load side of a panel. The STXP is the perfect fit from service entrance all the way down to an important machine specific control panel.

FEATURES AND BENEFITS:

- Designed with the industry leading Mersen TPMOV® Technology (internally fused)
- Enhanced 100kA surge capacity for longer life and higher single impulse withstand
- LED status indicator (ON = Good, OFF = Replace)
- LED phase loss indicators (ON = Operational, OFF = Maintenance Required)
- NEMA 4X enclosure for outdoor or indoor use
- Mounting hub and mounting feet for installation flexibility
- Pre-wired with 3' leads for easy installation
- Optional flush-mount kit for in-wall installation
- Optional audible alarm and remote dry contacts
- For use in ANSI/UL Type 1 or 2 SPD installations
- Up to 10 Modes of Protection (L-N, L-L, L-G, N-G)
- 10-year warranty

SURGE PROTECTIVE DEVICE

NEMA DEVICES FOR ANSI/UL 1449 TYPE 1 AND 2 APPLICATIONS

RATINGS:

- **Volts (U_n):** 120-600VAC
- **Nominal Discharge Current Rating (I_n):** 10-20kA
- **Surge Capacity:** 100kA
- **Short-Circuit Current Rating (SCCR):** 200kA

APPROVALS:

- ANSI/UL 1449 4th Edition, Type 1 SPD, File E210793
- CSA C22.2, Type 1 SPD
- ANSI/IEEE C62.41.1, C62.41.2, C62.45
- UL96A Lightning Protection
- RoHS Compliant



Available from

BREWS
BREWSSUPPLY.COM

SURGE-TRAP® STXP SERIES

GENERAL PRODUCT SPECIFICATIONS

Mounting:	Female 3/4" – 14 threaded hub	Operating & Storage Temperature:	-40°C to +85°C
Wiring:	Mounting feet with 0.125" diameter holes	Relative Humidity Range:	0 to 95% non-condensing
Enclosure:	Pre-wired 3' (1m) 10AWG	Visual End-of-Life Indicator:	GREEN = OK, OUT = REPLACE
Flammability:	NEMA 4X Non-metallic	Frequency:	50-60Hz
	UL94-5VA		

CATALOG NUMBER (INCLUDES SUFFIXES*)	SYSTEM VOLTAGE AND CONFIGURATION	I _n	MAXIMUM CONTINUOUS OPERATING VOLTAGE (MCOV, U _c)				VOLTAGE PROTECTION RATING (VPR) (UL 1449, 6kA, 3kV)			
			L-N	L-G	L-L	N-G	L-N	L-G	L-L	N-G
STXP120P10	120V Single Phase	20kA	150	150	-	150	600	700	-	500
STXP240S10	240/120V Split Phase	20kA	150	150	300	150	600	700	1000	500
STXP480S10	480/240V Split Phase	20kA	320	320	640	320	1200	1200	1800	1000
STXP208Y10	208/120V 3-Phase WYE	20kA	150	150	300	150	600	700	1000	500
STXP380Y10	380/220V 3-Phase WYE	20kA	320	320	640	320	1200	1200	1800	1000
STXP480Y10	480/277V 3-Phase WYE	20kA	320	320	640	320	1200	1200	1800	1000
STXP600Y10	600/347V 3-Phase WYE	20kA	420	420	840	420	1500	1500	2500	1500
STXP240D10	240V 3-Phase DELTA	20kA	-	320	640	-	-	1200	1800	-
STXP480D10	480V 3-Phase DELTA	10kA	-	550	1100	-	-	1800	3000	-
STXP600D05 (50kA)	600V 3-Phase DELTA	20kA	-	690	840	-	-	2500	2500	-
			L-N/HL-N	L-G/HL-G	L-L/HL-L	N-G	L-N/HL-N	L-G/HL-G	L-L/HL-L	N-G
STXP240H10	240/120V Hi-Leg DELTA	20kA	150/320	150/320	300/470	150	600/1.2k	700/1.2k	1.0k/1.0k	500
STXP480H05 (50kA)	480/240V Hi-Leg DELTA	10kA	320/550	320/550	640/870	320	1.2k/1.8k	1.2k/1.8k	1.8k/2.5k	1000

*Suffixes: Add Suffix "A" for Audible Alarm and Dry Contact. Example: STXP208Y10A

CATALOG NUMBER ACCESSORY DESCRIPTION

STXPFMK STXP Flush Mount Kit. Includes (1) mounting plate and (3) mounting screws

Optional Form C Dry Contact and Audible Alarm [Suffix "A"]

Form C Dry Contact (Pre-wired 3' 18AWG; 250V/60W/250VA)


- Gray = Normally Closed
- Blue = Common
- Red = Normally Open

Audible Alarm


Alarm sounds when any protection is lost



3/4"-14 Female Mounting Hub

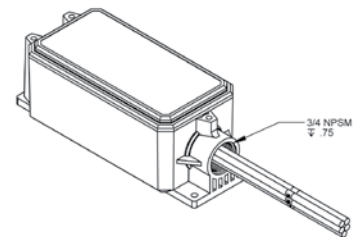

Dimensions and Mounting Configurations

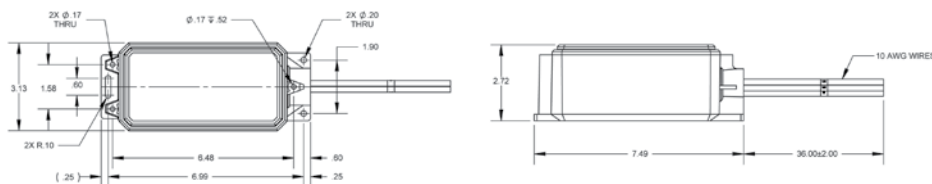

Flush Mount Option

